


Front and side view

- A Image height
- B Image base
- F Casing length
- G Height/floor
- H Foot height
- I Foot depth
- J Foot width

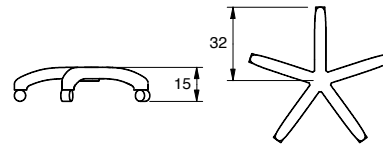

Technical data

Reference	A cm	B cm	F cm	G (min/max) cm	H cm	I cm	J cm	Closed screen cm	Net weight kg
Square format - Tripod									
TRE06B1150150	150	150	172	70 /95	247	86	76	187x16x25	10
TRE06B1180180	180	180	202	70 /117	299	97	84	217x16x25	13
TRE06B1200200	200	200	222	70 /97	299	97	84	237x16x25	19
TRE06B1240240	240	240	262	70 /57	299	97	84	277x16x25	22
4:3 format - Tripod									
TRE06B1180240	180	240	262	70 /57	299	97	84	277x16x25	21
Square format - 5-foot Stand									
PIE06B1150150	150	150	172	70 /95	247	-	-	187x65x65	10
PIE06B1180180	180	180	202	70 /117	299	-	-	217x65x65	13
PIE06B1200200	200	200	222	70 /97	299	-	-	237x65x65	19

Very robust and extremely easy to use. They are the ideal compromise for all projections that just need temporary installation.

Aluminum case with a white Epoxy varnish finish withstanding torsion.

- Supplied with a keystone eliminator for parallax compensation.
- Ultra-robust handle in Zamak.
- Fire-resistant projection surface



Chemin de Beurepaire
CS 42005
91410 DOURDAN
FRANCE
Tel +33 (0)1 64 59 94 54

www.oray.fr